




ROLLER VRM MF

PADFOOT DRUM

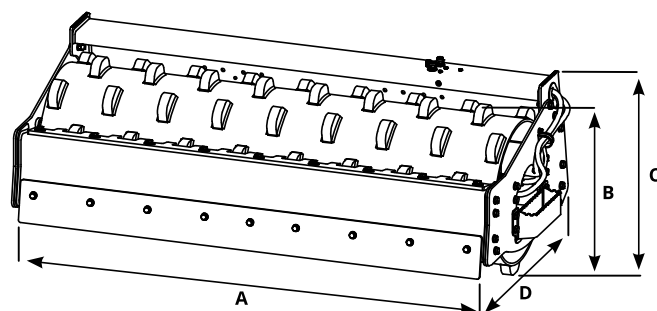

MODEL	VRM MF 160	VRM MF 180	VRM MF 200
A (mm)	1600	1800	2000
B (mm)	750	750	750
C (mm)	700	700	700
D (mm)	970	970	970
Without coupling weight Kg	870	950	1035
Teeth number	65	75	85
Pressure MIN. / MAX. (BAR)	180 / 220	180 / 220	180 / 220
Centrifugal force (kN) 2.000	8	8	11
Centrifugal force (kN) 2.500	12	13	17

NO FLOW CONTROL VALVE

Engine (CC)	17	22	26	30	17	22	26	30	17	22	26	30
Hydraulic Fluid Flow Rate (L/Min)	$\frac{38}{47}$	$\frac{49}{61}$	$\frac{58}{72}$	$\frac{67}{83}$	$\frac{38}{47}$	$\frac{49}{61}$	$\frac{58}{72}$	$\frac{67}{83}$	$\frac{38}{47}$	$\frac{49}{61}$	$\frac{58}{72}$	$\frac{67}{83}$
Rev/min (RPM)	$\frac{2000}{2500}$				$\frac{2000}{2500}$				$\frac{2000}{2500}$			
Vibration frequency (HERTZ)	$\frac{33}{42}$				$\frac{33}{42}$				$\frac{33}{42}$			

YES FLOW CONTROL VALVE

Engine (CC)	17	17	17
Hydraulic Fluid Flow Rate (L/Min)	41	41	41
Rev/min (RPM)	2200	2200	2200
Vibration frequency (HERTZ)	37	37	37
Centrifugal force (kN)	10	11	14

