

PRUNING SHEAR GRA-B

SHEAR WITH MOVING KNIFE FOR CUTTING
AND PRUNING TREES AND BUSHES

COMPATIBLE WITH



EXCAVATORS




DUAL FUNCTION

Grab and Cut
Move



BLADE IN
HARDOX 450

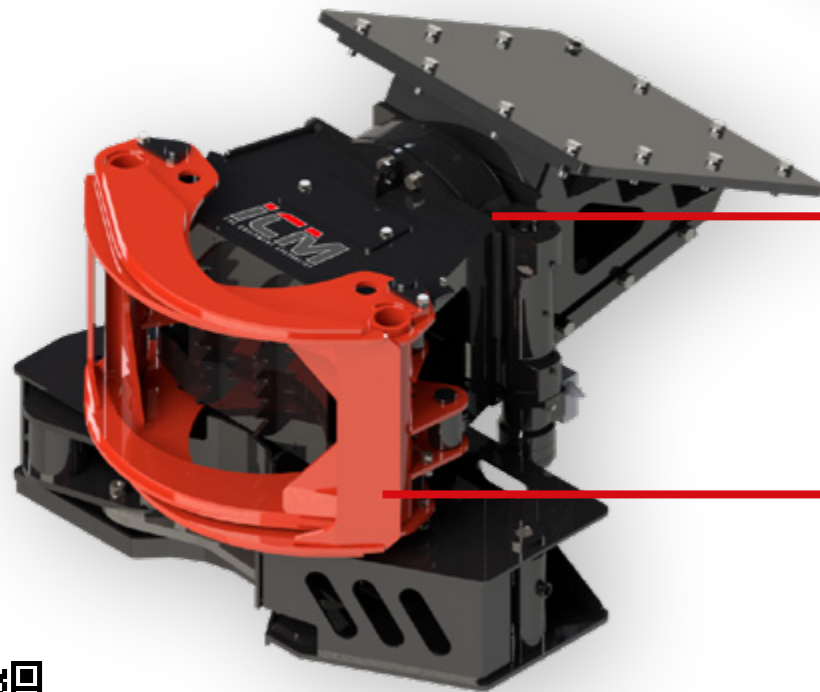

HYDRAULIC SLEW
RING ROTATION:
COMPACT AND
PERFORMING

TREE FELLING
PROCEDURE
THAT AVOIDS
THE TRUNK FALL



WATCH IT
AT WORK

EXCAVATORS		TON	6 - 12
MODEL			GRA-B 36
WEIGHT	kg		547
AREA	m ²		0,23
CLAMPING FORCE	daN		1180
MAX LOAD CAPACITY	kg		2500
MAX PRESSURE	bar		250
Ø - MAX CUTTING DIAMETER	mm		375
CUTTING FORCE	daN		18170
ROTATION MOTOR	MAX PRESSURE	bar	120
	MAX FLOW RATE	lt/min	12

* The information provided refers to the nominal cutting diameter and closing force at maximum permissible pressure. The actual cutting capacity may vary from case to case because it depends on various conditions, such as tree type, maturity, growing environment, etc.

Required for proper operation of the equipment:
2 x 1/2" hoses and 2 x 1/4" hoses

